

P/N: WTL9M10268

Resistance Welded HC-49/S Surface Mount Package



Customer	WTL
	Approved by: XoXo Lee
	Checked by: Susan He
	Issued by: Sheryl Xia

SPECIFICATION

维拓国际有限公司

WTL International Limited

Tel: 86-755-8267 7582

Fax: 86-755-82679302

www.wtlcrystals.com email: wtl@wtlcrystals.com

P/N: WTL9M10268

Resistance Welded HC-49/S Surface Mount Package



FEATURE



- Height 3.0mm, compact unit for surface mount
- Able to by means of a metal case and completely sealed high solution characteristics
- Copes with high density mounting and is the optimum for mass production




ELECTRICAL SPECIFICATIONS

Nominal frequency	25.000MHZ
Oscillation mode	Fundamental
Operating temperature range	40°C--+85°C
Storage temperature range	-40--+85°C
Frequency tolerance	± 10PPM
Freq. Temp characteristics	± 15PPM
Load capacitance	16pF
Equivalent series resistance(Ω)	30 ohm max
Parallel capacitance(Co)	7PF Max
Drive level	100 μW Typical
Insulation resistance	More than 500MΩ AT DC100V

Dimension

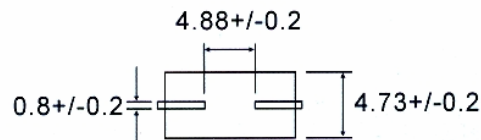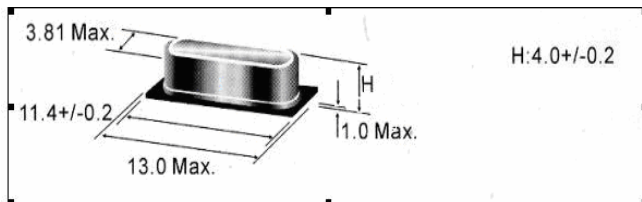

Tape & Reel

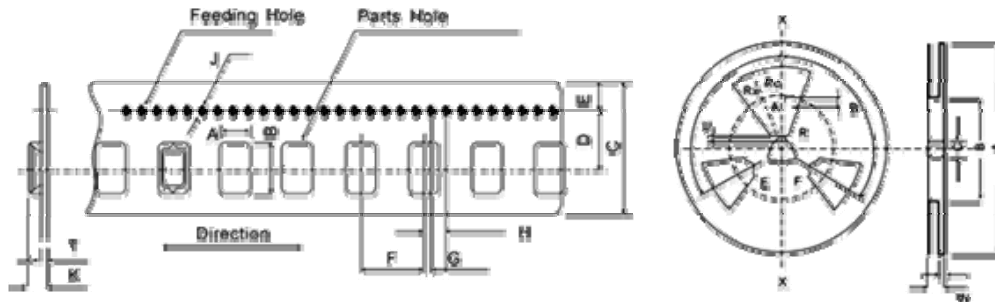

Description		Code	Dimensions	
Flanges	Diameter	A	$\phi 330 \pm 2.0$	
	Thickness	t	2.4 ± 0.2	
	Width between Flanges	W	$+2.0$ $24.4 - 0$	
Flanges	Outline Diameter	B	$\phi 100 \pm 2.0$	
	Center Coreslit	Width	F	2.3 ± 1.0
		Depth	V	6.0 ± 1.0
		Position	Q	$120^\circ \pm 3.0^\circ$
	Spindle Diameter	C	$\phi 13.0 \pm 0.5$	
	Key Seats	Width	E	2.5
		Depth	U	5.0 ± 0.5
Position		Q	$120^\circ \pm 3^\circ$	
Fenestrate	Outline Radius	Ro	$R90 \pm 1.0$	
	Inline Radius	Ri	$R40 \pm 1.0$	
	Rounded Corners	Rc	$+2.0$ $R5 - 0$	
	Open Angle	R	$40^\circ \pm 2^\circ$	

Code	Dimension	Code	Dimension	Code	Dimension
A	5.0 ± 0.1	E	1.75 ± 0.1	J	$\phi 1.5 (+0.1, -0)$
B	15.0 ± 0.2	F	$8.0 \pm 0.1 / 12.0 \pm 0.1$	K	5.0 ± 0.1
C	24.0 ± 0.3	G	2.0 ± 0.1	T	5.0 ± 0.1
D	11.05 ± 0.1	H	4.0 ± 0.1		