
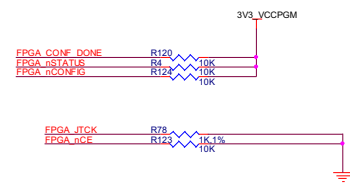


**USB Blaster Programming Header
(uses JTAG mode only)**



Fast Passive Parallel: MSEL[2:0]=000
 Passive Serial: MSEL[2:0]=010
 MSEL pins have internal 5kOhm pull-downs.
 PROG_B is equal to n_CONFIG in Altera

NOTE: VCCPGM = 2.5 OR 3.3v
 NOTE: VCCPD = 2.5 OR 3.3v
 NOTE: VCC? = 2.5 OR 3.3v

File	<Title>	Rev	<Rev>
Size	Document Number	Code	<Code>
C	<Doc>		
Date:	Saturday, November 08, 2008	Sheet	15 of 28